

Draft-Block™

Expanding Polyurethane Foam

DESCRIPTION:

Draft-Block™ is a one component, multiple purpose, UL Classified, expanding polyurethane foam sealant. It is designed to be dispensed as a bead from it's aerosol container to fill voids, cracks, crevices and small cavities on flat or irregular surfaces. Draft-Block™ uses a non-flammable blowing agent for a safer application process.

When cured, Draft-Block™ is an odorless, non-corrosive, non-reactive inert substance.

CHARACTERISTICS:

- Reduces heating and cooling costs by filling and insulating openings.
- Reduces sound transmission - an effective acoustical sealant.
- Tack-free approximately 10 minutes after being dispensed, cures to a firm resiliency in about 24 hours.
- Totally dielectric - will not transmit an electric current.
- Adheres readily to wood, glass, metal, tile, concrete and most plastics.
- Expands to three times its original dispensed volume. R-factor of 5 at 1 inch thickness.
- Optimal application temperature is 65° - 100°F (18° - 38° C).
- Cured foam is resistant to heat and cold -200° to 200° F (-129° to 93° C) and aging.
- Non-Flammable blowing agent for a safer application process.

APPLICATIONS:

Draft-Block™ is an excellent filler which bonds and insulates.

- Use in voids around plumbing and utility penetrations to stop drafts and prevent the intrusion of insects and other pests.
- Seal around windows, air conditioners, ducts and vents. Stops air leakage while filling cracks and voids. An energy saver in both heating and cooling seasons.
- Seal voids in siding, door jams, foundation, and concrete joints, is resistant to water and outdoor exposure.

PACKAGING:

<u>Code</u>	<u>Size</u>	<u>Qty. Per Case</u>	<u>Lbs. Per Case</u>	<u>Cu. Ft. Per Case</u>
96500	12 oz. aerosol	12 cans	13	.56

Draft-Block™

INSTRUCTIONS:

- Wear protective gloves, goggles and work clothes during use. Use with adequate ventilation.
- Optimal temperature for use is between 65° - 100° F (18°-38°C). Clean grease and oil off surfaces to be foamed. Cover surrounding surfaces.
- Shake well. Screw nozzle adapter onto valve stem, being careful not to activate valve.
- With valve end of can down, slowly press trigger to dispense foam. Test on experimental surface.
- Fill cavity only 1/3 full with foam to allow for expansion. For cavities greater than 3 in. (75 mm) diameter, moisten substrate before applying.
- Dries tack-free in approximately 10 minutes, cures in 24 hours. Do not disturb uncured foam.
- Uncured foam may be removed with acetone. Cured foam must be removed mechanically. Cured foam can be trimmed or sanded. Cured foam exposed to sunlight must be covered with paint or stain.
- Store upright in cool, dry area. Leave nozzle on can. To reuse, cut 1 in. (3 cm) off nozzle tip.

For additional technical information, call Toll Free 1-800-231-3345.

PRECAUTIONS:

**FOR CHEMICAL EMERGENCY, SPILL, LEAK, FIRE, EXPOSURE OR ACCIDENT,
CALL CHEMTREC - DAY OR NIGHT 1-800-424-9300**

CAUTION - CONTENTS UNDER PRESSURE.

Container may burst if heated or stored at temperatures above 120° F, (49° C). Irritating to eyes, skin, and respiratory system. May cause sensitization by inhalation and/or skin contact. Keep away from heat, sparks, and open flame. Use only in a well ventilated area or wear suitable respiratory protection. Do not puncture or incinerate can. Do not breathe vapor or spray mist. Wear eye/face protection and other suitable protective clothing. **KEEP OUT OF REACH OF CHILDREN.**

For additional information, refer to Material Safety Data Sheet.

SPECIFICATIONS:

Color	Beige
Shelf Life	2 years


APPROVALS / STANDARDS

UL Classified - File # R13919 Caulking and Sealants
ASTM E-84 (12.5%)
Flame Spread 10
Smoke Developed 20

CCMC (#09421-R)

ODP (Ozone Depletion Potential): Contains HCFC 22 propellant. Consult MSDS for reporting requirements

VOC Content: Contains no VOC's
NFPA 30B Classification: Level 1 Aerosol

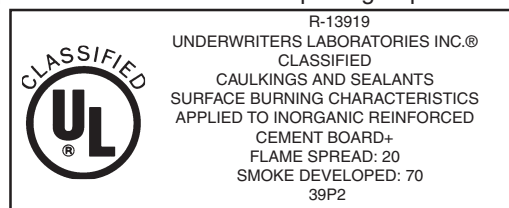

Suggestions and recommendations covering the use of our products are based on our past experience and laboratory findings. However, as we have no control as to the methods and conditions of application, we only assume responsibility for the uniformity of our products within manufacturing tolerances.

LIMITED WARRANTY:

RectorSeal makes the Limited Express Warranty that when the instructions for storage and handling of our products are followed we warrant our products to be free from defects. **THIS LIMITED EXPRESS WARRANTY IS EXPRESSLY IN LIEU OF ANY OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND OF ANY OTHER OBLIGATION ON THE PART OF RECTORSEAL.** The sole remedy for breach of the Limited Express Warranty shall be the refund of the purchase price. All other liability is negated and disclaimed, and RectorSeal shall not be liable for incidental or consequential damages.

MANUFACTURED IN U.S.A. FOR

RectorSeal • 2601 Spenwick Drive • Houston, Texas 77055-1035

Telephone: 713-263-8001 or 1-800-231-3345 Fax: 713-263-7577 or 1-800-441-0051

www.rectorseal.com