

# Mini Aqua Silent+

Mini-Split Condensate Pump Kit 250v  
83812 (ASP-MA-230-SP)

### Project Information:

**Job Name:** \_\_\_\_\_

**Location:** \_\_\_\_\_

**Engineer:** \_\_\_\_\_

**Submitted to:** \_\_\_\_\_

**For:**  Reference  Approval  Construction

**Submitted by:** \_\_\_\_\_

**Reference:** \_\_\_\_\_

### Submittal Information:

**Approval:** \_\_\_\_\_

**Date:** \_\_\_\_\_

**Construction:** \_\_\_\_\_

**Unit #:** \_\_\_\_\_

**Drawing #:** \_\_\_\_\_

### (Sec. I) Product Specifications:

Pump Length - 6.5"  
 Pump Width - 1.125"  
 Pump Height - 1.125"  
 Capacity - 3.2 GPH @ 0' Head / 1.6 GPH @ 33' Head  
 Max BTUs - 49,500  
 Max Head in Feet - 33  
 Max Temperature - 104F  
 Max Suction Lift - 5'  
 Sound Level - 19dB(A)  
 Dry Contact Rating - 3A NC  
 Voltage - 208-230v  
 Amperes - .1 MAX  
 Watts - 16  
 Remote Reservoir - Y  
 Plenum Rated - N  
 Cable Length - 6'  
 Sound level and pump performance varies with voltage frequency.

**Pump Selector & Wiring Diagrams Available at**  
<http://www.rectorseal.com/aspenspump.html>

### (Sec. II) Ordering Information:

Product Code - 83812  
 Model - ASPMA230SP  
 Carton Qty - 1  
 Carton Weight - 1.5


### (Sec. III) Carton Contents:

Pump Assembly	Inline Fuse
Inline Reservoir	Cable Ties (6)
8"x5/8" i.d. Inlet Tube	Self Adhesive Velcro Strips (2)
5'x1/4" i.d. Vinyl Discharge Tube	Anti-siphon (1)
Installation Manual	Anti-Vibration bracket (1)
6"x1/4" i.d. Vinyl Breather Tube	90° Elbow
Drain Hose Adaptor	

### (Fig. I) Product Image:



### (Fig. II) Typical Pump Locations:

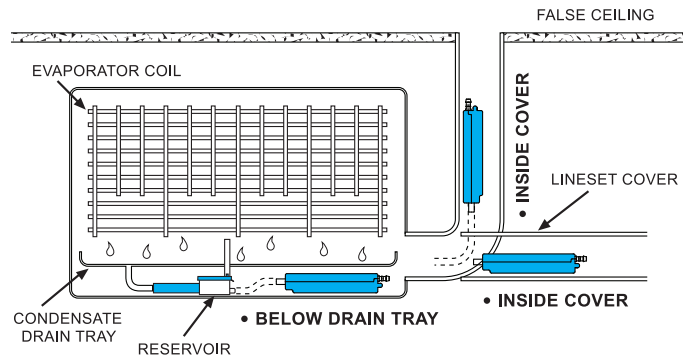

(RectorSeal's products are subject to continuous improvements; RectorSeal reserves the right to modify product design, specifications & information in this data sheet without notice and without incurring any obligations)

ASPEN® is a registered trademark of Aspen Oldco Limited Company UK

# Mini Aqua Silent+

Mini-Split Condensate Pump Kit 250v  
83812 (ASP-MA-230-SP)



## Aspen Pump BTU Calculator

Mini Aqua 230v 60Hz		
Head	GPH	BTU
0	2.9	49500
5	2.4	42000
10	2.2	37500
15	2	34000
20	1.7	29250
25	1.5	25800
30	1.3	22400
33	1.2	20600

